9.2 EXTERIOR SECTION

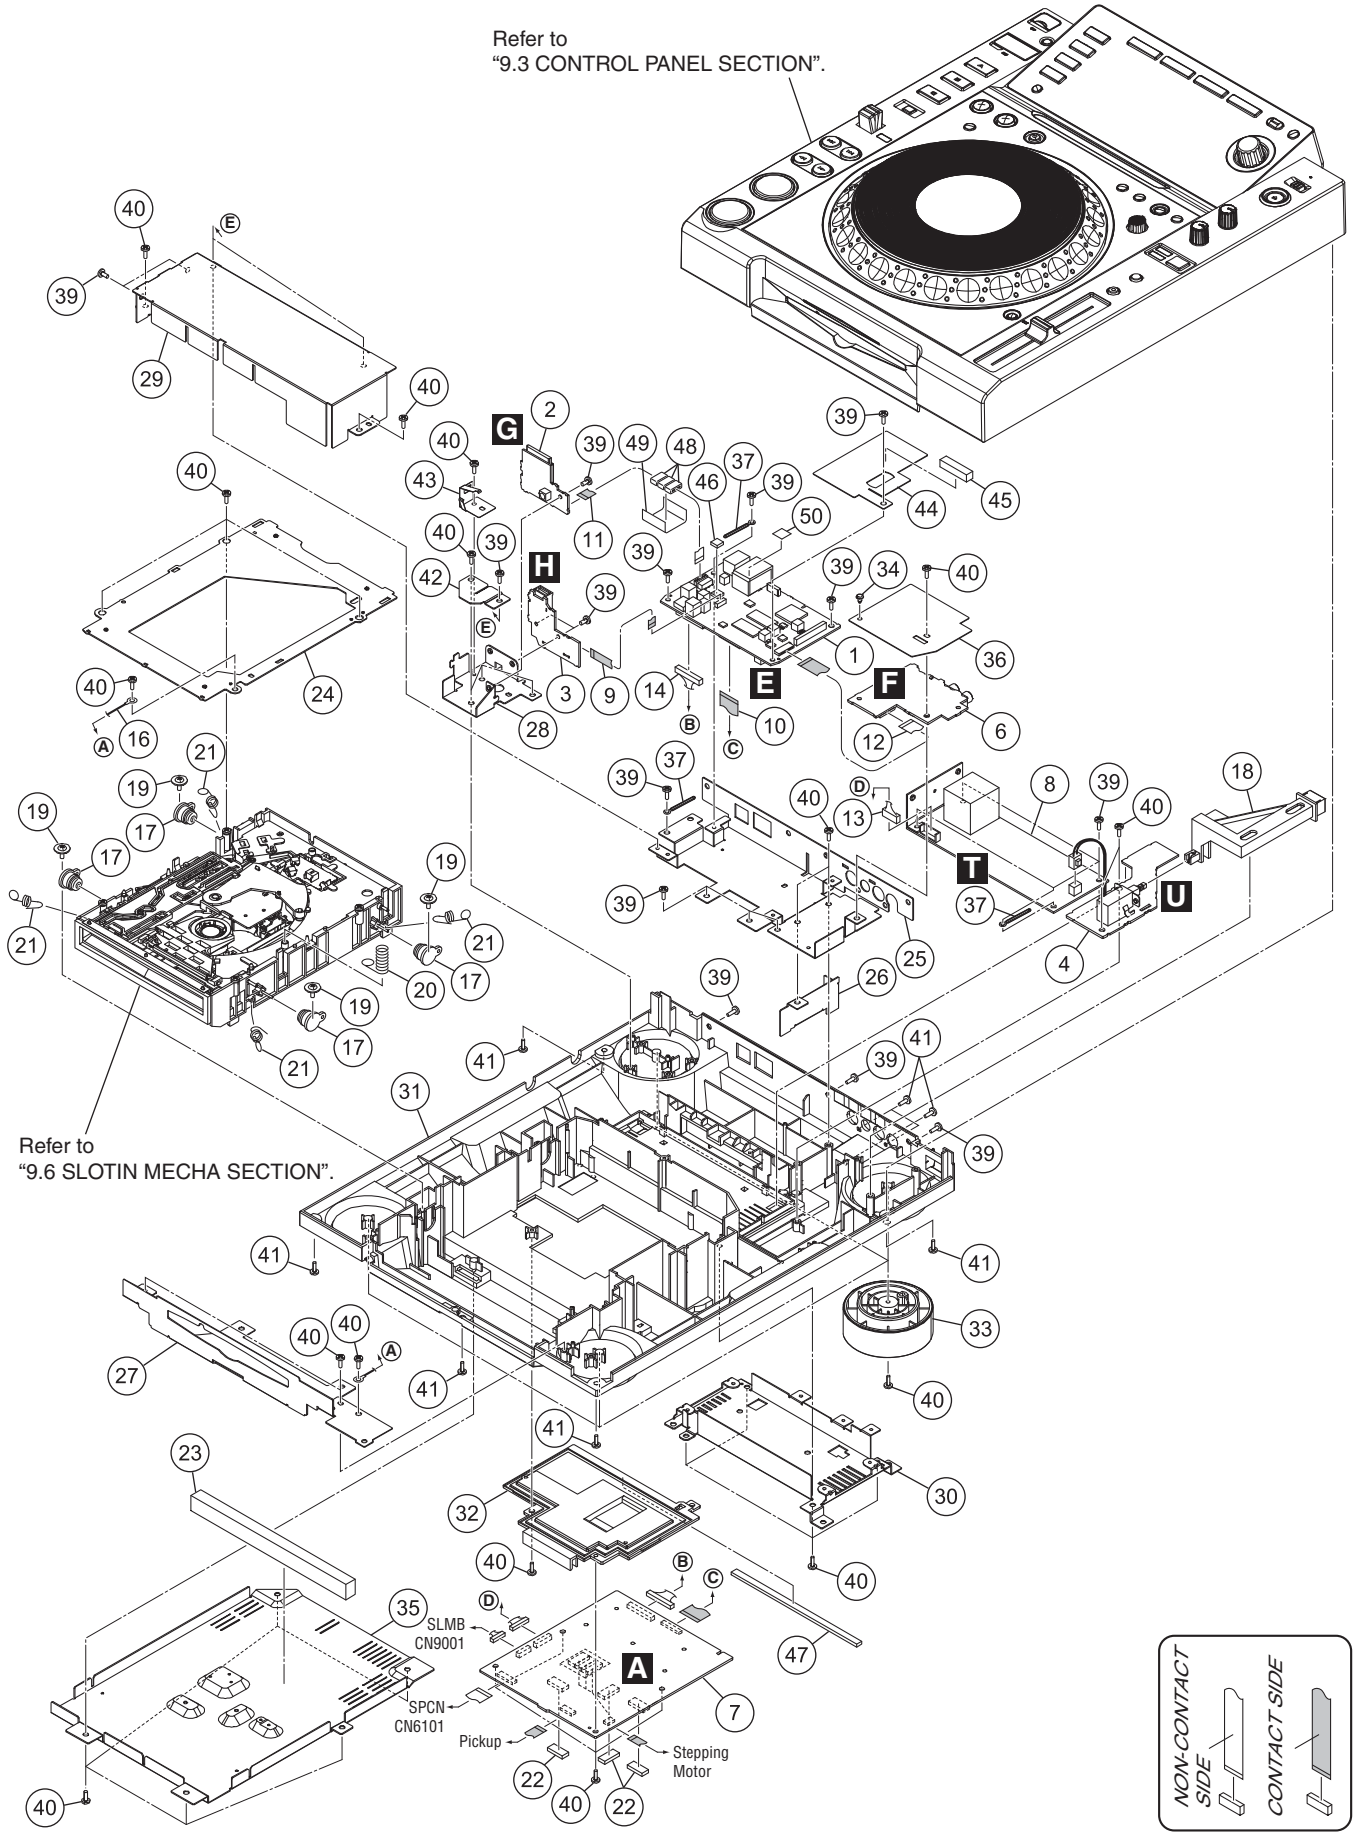

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MAIN Assy	DWG1660
	2	SDCB Assy	DWX2980
	3	USBA Assy	DWX3043
	4	ACIN Assy	See Contrast table (2)
	5	•••••	
	6	JACB Assy	DWX2988
	7	SRVA Assy	DWX2948
⚠	8	POWER SUPPLY Assy	DWR1463
	9	14P FFC	DDD1478
	10	40P FFC	DDD1479
	11	10P FFC	DDD1480
	12	13P FFC	DDD1484
	13	Connector Assy	DKP3844
	14	Connector Assy 12P	DKP3845
	15	•••••	
	16	Cord with Plug	DE007VE0
	17	Damper	CNV6011
	18	Power Knob	DAC2484
	19	DM Screw (FTC)	DBA1260
	20	Earth Spring	DBH1398
	21	Float Spring (G5)	DBH1494
NSP	22	Slicon Rubber D5 L	DEB1456
	23	Bottom Packing	DEC3209
	24	Mecha Plate	DNH2339
	25	MAIN PCB Stay	DNH2854
	26	Inlet Shield	DNH2856
	27	Front Plate	DNH2857
	28	SD Stay	DNH2858
	29	Shield Case	DNH2859
	30	SWPS Stay	DNH2890
	31	Chassis	See Contrast table (2)
	32	Servo Cover	DNK5492
	33	Insulator Assy	DXB2057
	34	Rivet (3 x 4.5)	RBM-003
	35	Bottom Plate	See Contrast table (2)
	36	Jack Cover	DEC3205
	37	Cord Clamper (Steel)	RNH-184
	38	•••••	
	39	Screw	BBZ30P060FTB
	40	Screw	BPZ30P080FNI
	41	Screw	BPZ30P080FTB
	42	SD Earth Plate	DNH2925
	43	SD Earth Spring	DBK1357
	44	Main Cover	DEC3258
	45	FFC Cushion	DEC3248
	46	EMC Sheet	DEC3259
	47	Vessel Cushion A	DEC2852
	48	Ferrite Core	BTX1037
	49	Cushion (FC)	DEC3249
	50	Tape	DEC3053

(2) CONTRAST TABLE

CDJ-2000/CUXJ, SYXJ8, FLXJ, KXJ5 and AXJ5 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000 /CUXJ	CDJ-2000 /SYXJ8	CDJ-2000 /FLXJ	CDJ-2000 /KXJ5	CDJ-2000 /AXJ5
	4	ACIN Assy	DWR1475	DWR1453	DWR1453	DWR1453	DWR1453
	31	Chassis	DNK5444	DNK5324	DNK5445	DNK5448	DNK5447
	35	Bottom Plate	DNH2893	DNH2852	DNH2904	DNH2903	DNH2902

2. CONTRAST OF MISCELLANEOUS PARTS

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*
- *Nos. indicate the pages and Nos. in the service manual for the base model.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560Ω → 56 x 10^1 → 561 ····· RD1/4PU561J
47kΩ → 47 x 10^3 → 473 ····· RD1/4PU473J
0.5Ω → R50 ····· RN2HR50K
1Ω → 1R0 ····· RS1P1R0K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62kΩ → 562 x 10^1 → 5621 ····· RN1/4PC5621F

2.1 CONTRAST TABLE

(1) CDJ-2000 and CDJ-2000/2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000 /CUXJ,/SYXJ8,/FLXJ,/KXJ,/AXJ5	CDJ-2000 /UXJCB2,/SYXJ82,/FLXJ2,/KXJ2,/AXJ52	Remarks
		PCB ASSEMBLIES			
NSP		1..TFTA Assy	DWM2355	DWM2445	
	P77-2	2..SDCB Assy	DWX2980	DWX3293	*2
	P83-1	2..TFTB Assy	DWX2882	DWX3291	*1
	P83-2	2..CDCB Assy	DWX2987	DWX3292	*1
		DISPLAY SECTION			
	P83-3	LCD	DWX3126	CWX3970	
	P83-17	LCD Packing (Top)	DEC3193	DEC3376	
	P83-18	LCD Stay	DND1263	DND1267	
	P83-19	Rear Bracket	DND1264	DND1268	
	P83-20	LCD Holder	DNH2850	Not used	
	P83-21	LCD Panel	DNK5319	DNK5951	
	P83-30	Screw	BBZ30P060FTB(x 22)	BBZ30P060FTB(x 21)	
	P83-31	Screw	BSZ20P040FTB	Not used	
		Screw	Not used	BSZ30P040FTC	No. 1
		40P FFC	Not used	DDD1541	No. 2
		Fitting/LCD	Not used	DNH2992	No. 3

(2) CDJ-2000/CUXJ and CDJ-2000/UXJCB2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/CUXJ	CDJ-2000/UXJCB2	Remarks
		PACKING SECTION			
⚠	P75-1	Power Cable	ADG7021	ADG7022	
	P75-23	Packing Case	DHG2800	DHG3025	

(3) CDJ-2000/SYXJ8 and CDJ-2000/SYXJ82 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/SYXJ8	CDJ-2000/SYXJ82	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2799	DHG3026	

(4) CDJ-2000/FLXJ and CDJ-2000/FLXJ2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/FLXJ	CDJ-2000/FLXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2801	DHG3028	

(5) CDJ-2000/KXJ5 and CDJ-2000/KXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/KXJ	CDJ-2000/KXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2804	DHG3029	

(6) CDJ-2000/AXJ5 and CDJ-2000/AXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/AXJ5	CDJ-2000/AXJ52	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2803	DHG3030	

*1 Refer to “3.PCB PARTS LIST”, “5.SCHEMATIC DIAGRAM” and “6.PCB CONNECTION DIAGRAM”.

*2 Although DWX2980 and DWX3293 are different in part number, they are constructed same. Refer to “CDJ-2000/CUXJ(RRV3999)”.

Changing the constants for the parts of the MAIN and JACB Assys

With a modification of the LCD section, the constants for the parts of the MAIN and JACB Assy, have been changed for improvement of the sound quality.

Mark	No.	Description	Part No.		
MAIN Assy : DWG1660					
RESISTORS					
R	570	RS1/16SS332J	=>	RS1/16SS222J	
R	571	RS1/16SS332J	=>	RS1/16SS222J	
R	572	RS1/16SS332J	=>	RS1/16SS222J	
R	573	RS1/16SS332J	=>	RS1/16SS222J	
CAPACITORS					
C	3093	CEHVAW101M16	=>	CCH1565	
JACB Assy : DWX2988					
CAPACITORS					
C	9401	CEHAZL220M50	=>	CEHAZL101M25	
C	9404	CEHAZL220M50	=>	CEHAZL101M25	